

# 78 Material


A MnZn ferrite specifically designed for power applications for frequencies up to 200 kHz.

RFID rods, toroids, pot cores, EP cores, PQ cores, ETD cores, and E&I cores are all available in 78 material.

### 78 Material Specifications:


| Property   | Unit             | Symbol                | Value           |
|--|------------------|-----------------------|-----------------|
| Initial Permeability @ B < 10 gauss                        |                  | $\mu_i$               | 2300            |
| Flux Density @ Field Strength                              | gauss<br>oersted | B<br>H                | 4800<br>5       |
| Residual Flux Density                                      | gauss            | $B_r$                 | 1500            |
| Coercive Force   | oersted          | $H_c$                 | 0.20            |
| Loss Factor @ Frequency                                    | $10^{-6}$<br>MHz | $\tan \delta / \mu_i$ | 4.5<br>0.1      |
| Temperature Coefficient of Initial Permeability (20 -70°C) | %/°C             |                       | 1.0             |
| Curie Temperature  | °C               | $T_c$                 | >200            |
| Resistivity  | $\Omega$ cm      | $\rho$                | $2 \times 10^2$ |

Complex Permeability vs. Frequency

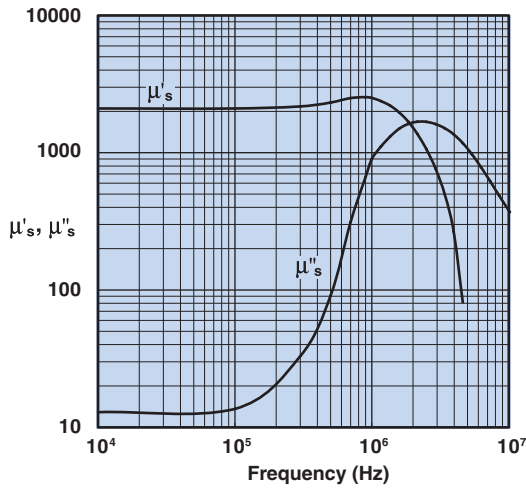


Measured on an 18/10/6mm toroid using the HP 4284A and the HP 4291A.

Incremental Permeability vs. H

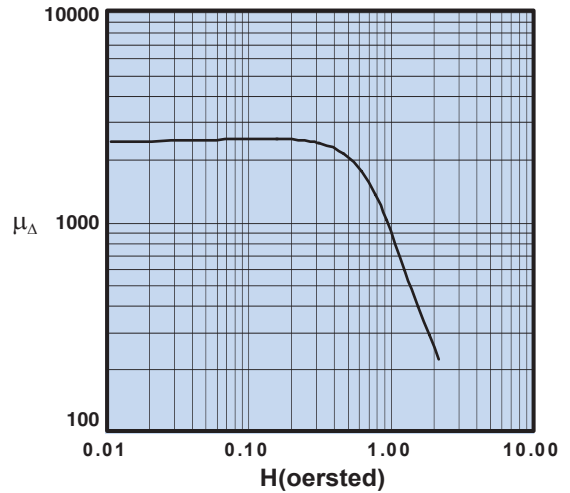


Initial Permeability vs. Temperature

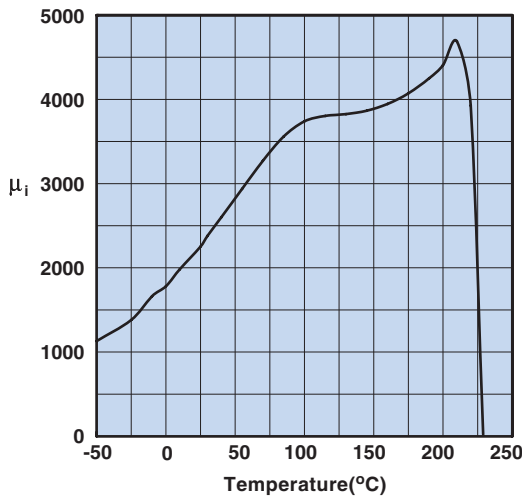

Measured on an 18/10/6mm toroid at 100kHz.

Hysteresis Loop

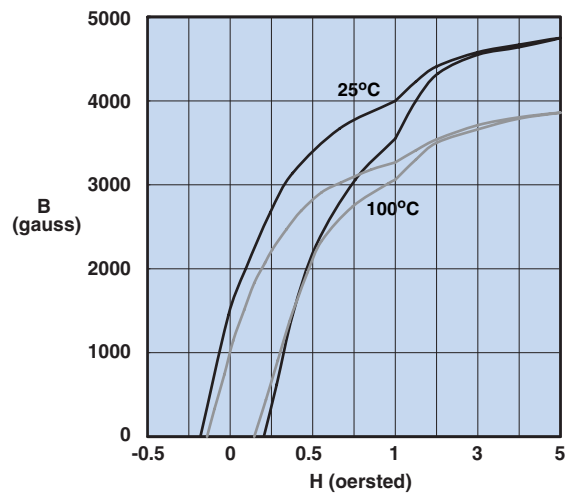

Measured on an 18/10/6mm toroid at 10kHz.

## Fair-Rite Products Corp.


Phone: (888) FAIR RITE / (845) 895-2055 • FAX: (888) FERRITE / (845) 895-2629  
(888) 324-7748 (888) 337-7483

PO Box J, One Commercial Row, Wallkill, NY 12589-0288

• www.fair-rite.com  
• E-Mail: ferrites@fair-rite.com


# 78 Material

Amplitude Permeability vs. Flux Density

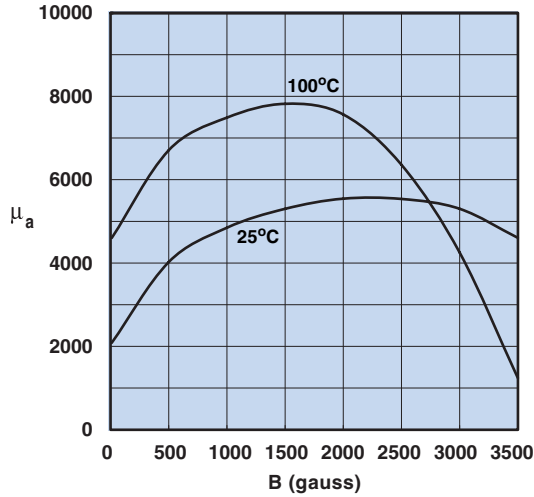


Measured on an 18/10/6mm toroid at 10kHz.

Power Loss Density vs. Flux Density

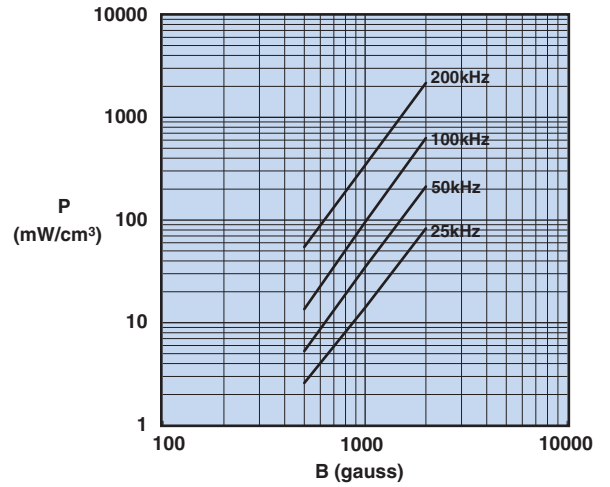


Measured on an 18/10/6mm toroid using the Clarke Hess 258 VAW at 100°C

Power Loss Density vs. Temperature

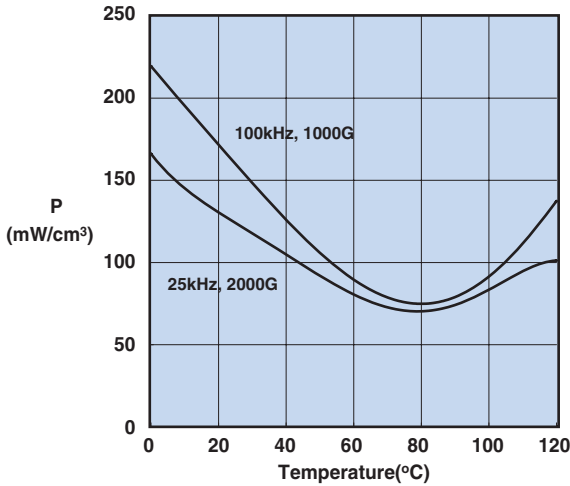

Measured on an 18/10/6mm toroid using the Clarke Hess 258 VAW.

Flux Density vs. Temperature

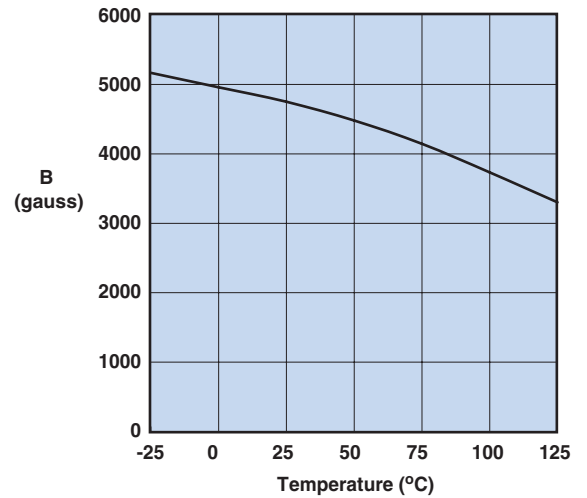

Measured on an 18/10/6 mm toroid at 10kHz and H=5 oersted.